

ISOLATE SWITCH



Model: IS-101

Features


- ❑ Suitable for 12/24 Vdc systems
- ❑ Heavy-duty copper studs and contacts
- ❑ Surface or recessed installation
- ❑ Removeable keys
- ❑ Easy installation
- ❑ CE certified.

Specifications

- ❑ Continuous rating: 100Amps/12V
- ❑ Intermittent rating: 250Amps/12V
- ❑ Operation: ON/OFF
- ❑ Housing: nylon
- ❑ Studs: M8, copper
- ❑ Nuts: steel with zinc plated

Dimensions

For both IS-101 and IS-201

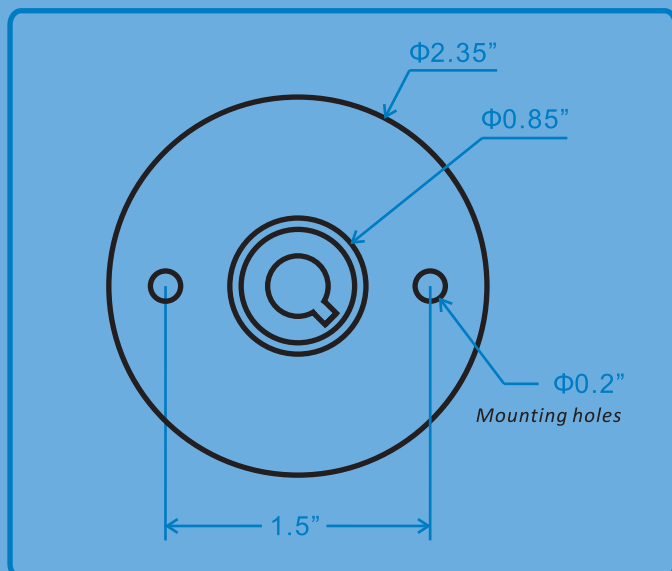

Model: IS-201

Features

- ❑ Suitable for 12/24 Vdc systems
- ❑ Heavy-duty copper studs and contacts
- ❑ Surface or recessed installation
- ❑ Removeable keys
- ❑ Easy installation
- ❑ CE certified.

Specifications

- ❑ Continuous rating: 200Amps/12V
- ❑ Intermittent rating: 500Amps/12V
- ❑ Operation: ON/OFF
- ❑ Housing: nylon
- ❑ Studs: M10, copper with silver plated
- ❑ Nuts: brass

Optional accessories


Boots and cap, for both IS-101 and IS-201

Boots (PVC)



Cap (PP)

ISOLATE SWITCH

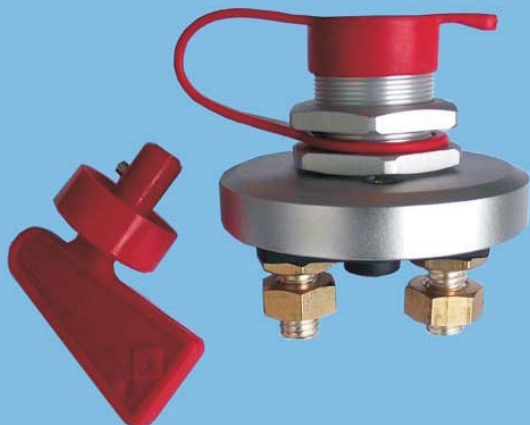

Model: IS-202

Features


- ▣ Suitable for 12/24 Vdc systems
- ▣ Heavy-duty copper studs and contacts
- ▣ Recessed installation
- ▣ Removeable keys
- ▣ IS-201 with anodized aluminum case
- ▣ Aluminum mounting nuts included
- ▣ Soft PVC cap included

Specifications

- ▣ Continuous rating: 200Amps/12V
- ▣ Intermittent rating: 500Amps/12V
- ▣ Operation: ON/OFF
- ▣ Housing: nylon and aluminum
- ▣ Studs: M10, copper with silver plated
- ▣ Nuts: brass

Dimensions

Cut out mounting hole: dia 1.07"-1.10".

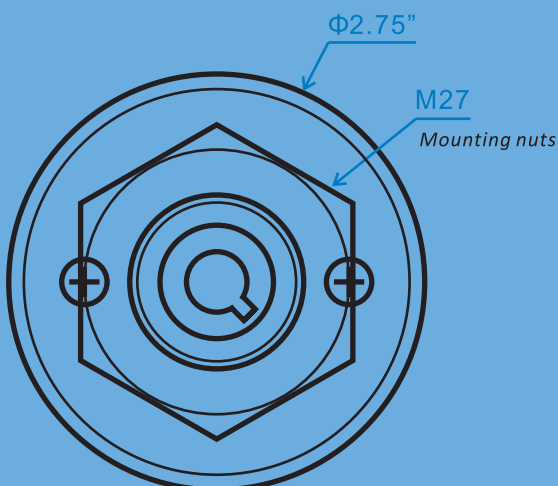

Model: IS-301

Features

- ▣ Suitable for 12/24 Vdc systems
- ▣ Heavy-duty copper studs and contacts
- ▣ Surface or recessed installation
- ▣ Removeable knob
- ▣ Stainless steel mounting screws included
- ▣ CE certified
- ▣ Ip65

Specifications

- ▣ Continuous rating: 300Amps/12V
- ▣ Intermittent rating: 600Amps/12V
- ▣ Operation: ON/OFF
- ▣ Housing: polybutylene terephthalate (PBT)
- ▣ Studs: M10, copper
- ▣ Nuts: brass

Dimensions

For recessed mounting, cut out hole of dia 2.05".

